





## Features

- ❖ Robust design
- ❖ Sliding regulator provided
- ❖ PLC controlled (optional)
- ❖ Cooling fans (optional)

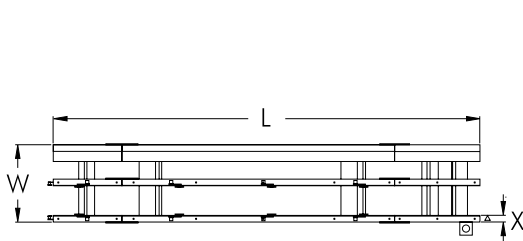

Plan View

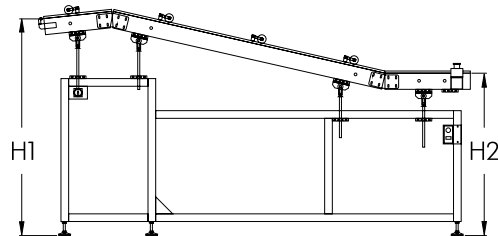

Front View

Legend  
 △ : Fixed Point

### SPECIFICATIONS

<b>Description</b>	This unit is used for transferring of PCBs/pallets from the soldering machine.
<b>Conveyor Speed</b>	0.5 - 3 m/min. or specify
<b>PCB Edge Support</b>	3 mm
<b>Power Source</b>	100, 230VAC 1Ph
<b>Power Consumption</b>	150VA max.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM2300-M	2500 x 535 x H1, H2 (specify upon order)	50 mm	180 kg
L	NTM2300-L	2500 x 690 x H1, H2 (specify upon order)	50 mm	200 kg