


Features

- ❖ Modular design
- ❖ Stability enhanced by 'robust design'
- ❖ Laser carved stainless steel side guides for superior quality and durability
- ❖ Ergonomically designed arm rest
- ❖ Smooth and parallel width adjustment
- ❖ Multi-zone concept available upon request
- ❖ Different lengths available upon request
- ❖ SMEMA compatible
- ❖ Patented (SG Patent No.: 91261)

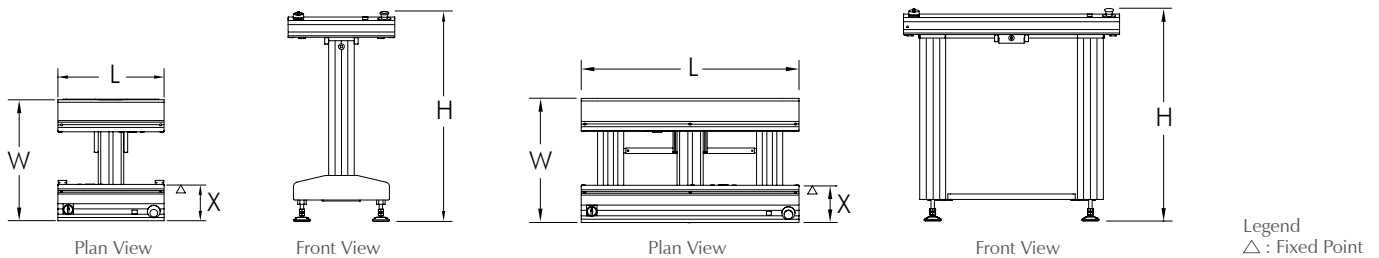

SPECIFICATIONS	
Description	This unit is used to link between SMD machines or board handling units.
Conveyor Concept	Belt
Conveyor Speed	14 m/min. or specify
Power Source	100, 230VAC 1Ph
Power Consumption	100VA max.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM0401-M	500 x 570 x 985	168 mm	45 kg
L	NTM0401-L	500 x 727 x 985	168 mm	50 kg
M	NTM0401-M	1000 x 570 x 985	168 mm	60 kg
L	NTM0401-L	1000 x 727 x 985	168 mm	70 kg