


Features

- ❖ Surrounded with covers to provide highest level of safety
- ❖ Top safety cover can be opened for easy access to hardware during maintenance
- ❖ User friendly 'soft touch' LED membrane control panel
- ❖ Adjustable suction positions provide better grips of PCBs
- ❖ Smooth and parallel width adjustment
- ❖ Small machine footprint
- ❖ SMEMA compatible

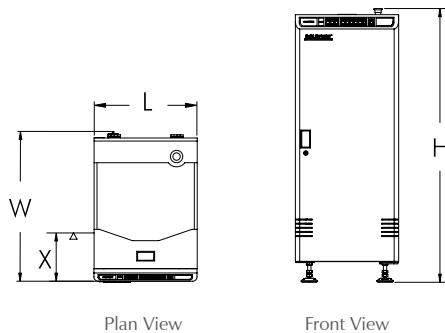

Plan View

Front View

Legend
△ : Fixed Point



* Tower light (optional)

SPECIFICATIONS

Description	This unit is used for loading of bare PCBs to the production line.
Maximum PCBs Height	220 mm
Cycle Time	Average 10 seconds
Power Source	100, 230VAC 1Ph
Power Consumption	150VA max.
Air Pressure	6 bar
Air Consumption	90 ltr/min. max.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM0200-M	500 x 730 x 1330	234 mm	110 kg
L	NTM0200-L	653 x 870 x 1330	234 mm	140 kg
M	NTM0200PM (Pass through)	500 x 730 x 1330	234 mm	110 kg
L	NTM0200PL (Pass through)	653 x 870 x 1330	234 mm	140 kg