


Plan View



Front View

Legend
 Δ : Fixed Point

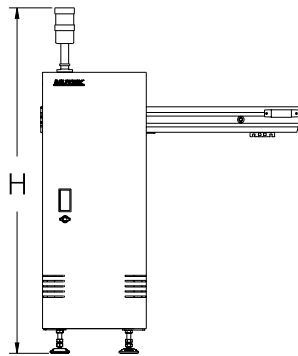

Features

- ❖ 600 mm passage way or specify
- ❖ Cylinder assisted lifting motion
- ❖ Pneumatic locking device installed to enhance safety
- ❖ Smooth and parallel width adjustment (leadscrew)
- ❖ SMEMA compatible

SPECIFICATIONS	
Description	This unit is used when a passage way is required in a production line.
Cycle Time	Average 8 seconds
Power Source	100, 230VAC 1Ph
Power Consumption	100VA max.
Air Pressure	4 - 6 bar
Air Consumption	35 ltr/min. max.
PCB Thickness	0.6 mm min.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM1500-M	1000 x 790 x 1110	194 mm	90 kg
L	NTM1500-L	1000 x 920 x 1110	194 mm	100 kg