




\* Tower light (optional)

## Features

- ❖ User friendly touch screen panel
- ❖ Preset PCB counter and warning alarm will sound as reminder to change adhesive rolls
- ❖ Double side cleaning (selectable)
- ❖ Static elimination (double sided)
- ❖ Easy access to adhesive rolls
- ❖ Internal conveyor system to buffer board before cleaning
- ❖ Smooth and parallel width adjustment (leadscrew)
- ❖ SMEMA compatible

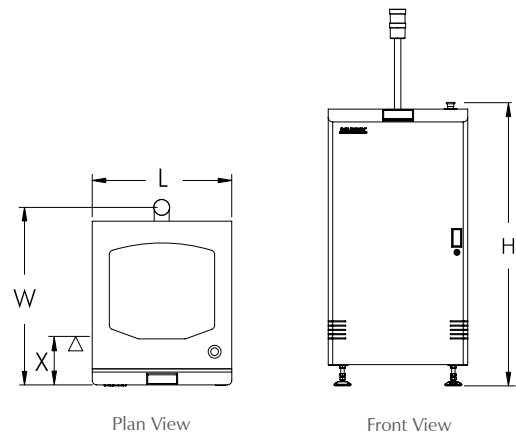

Legend  
 Δ : Fixed Point

## SPECIFICATIONS

SPECIFICATIONS	
Description	This unit is used for removing dust, particles, glass fiber & etc on bare PCBs surface.
Speed	2 - 14 m/min.
Power Source	100, 230VAC 1Ph
Power Consumption	310VA max.
Air Pressure	4 - 6 bar
Air Consumption	2 ltr/min. max.
PCB Thickness	0.6 - 4 mm

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM5000-M	653 x 800 x 1330	220 mm	180 kg
L	NTM5000-L	750 x 1050 x 1330	220 mm	200 kg