




* Tower light (optional)

Features

- ❖ User friendly 'soft touch' LED membrane control panel
- ❖ Uninterrupted loading
- ❖ Pass through mode provided
- ❖ Smooth and parallel width adjustment (leadscrew)
- ❖ Small machine footprint
- ❖ SMEMA compatible

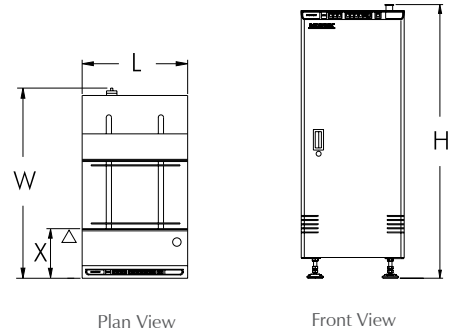

Legend
 Δ : Fixed Point

Plan View

Front View

SPECIFICATIONS

Description	This unit is used for loading of bare PCBs to the production line.
Maximum PCBs Height	220 mm
Maximum Load	15 kg
Cycle Time	Average 10 seconds
Power Source	100, 230VAC 1Ph
Power Consumption	150VA max.
Air Pressure	4 - 6 bar
Air Consumption	5 ltr/min. max.
PCB Thickness	0.6 - 4 mm

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM1200-M	500 x 905 x 1330	234 mm	150 kg
L	NTM1200-L	500 x 905 x 1330	234 mm	150 kg