




Features

- ❖ High resolution inkjet printer
- ❖ User friendly software
- ❖ Digitally controlled linear axis for X & Y movements
- ❖ Selectable by-pass operation
- ❖ Automatic width adjustment conveyor
- ❖ PCB side clamping
- ❖ PCB lifting system for constant focal point
- ❖ Short product change-over time
- ❖ Barcode scanner or camera for readability check
- ❖ Industrial PC & 21.5" LCD monitor
- ❖ SMEMA compatible

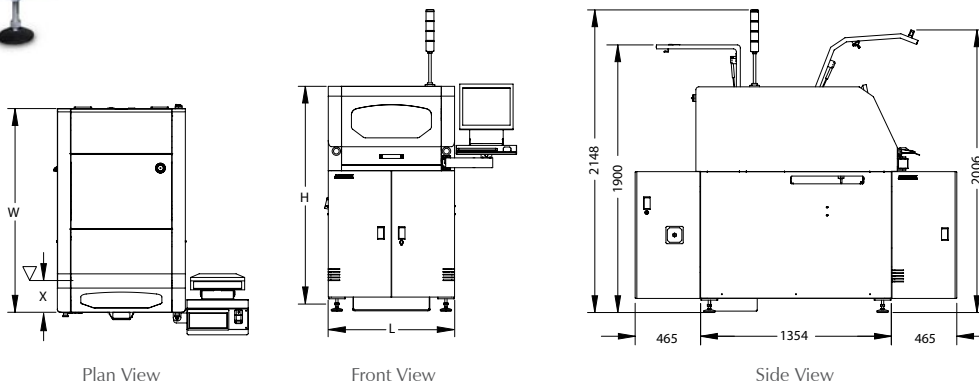

Legend
 △ : Fixed Point

SPECIFICATIONS

Description	This unit is used to mark text, barcode, 2D code & graphic onto PCBs.
Print resolution	100 dots/inch (*Optional: up to 170 dpi)
Print size	1 - 5 mm (based on different resolution)
Throw distance	4 - 15 mm
Marking Area	460 x 460 mm total coverage
Marking Speed	1 meter/sec
PCB transfer time	≤ 6 secs
Conveyor speed	16 m/min.
PCB Width	65 - 460 mm
PCB Length	80 - 460 mm
Power Source	100, 230VAC 1Ph
Power Consumption	600VA max.
Air Pressure	4 - 6 bar
Air Consumption	2 ltr/min. max.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
XL	NTM5400-X	900 x 1440 x 1600	240 mm	420 kg