


Plan View

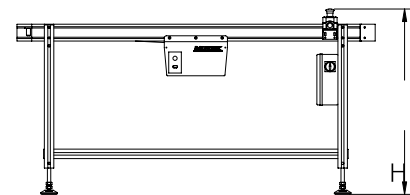

Front View

Legend
 △ : Fixed Point

Features

- ❖ Conductive belt
- ❖ Stability enhanced by 'robust design'
- ❖ Available in 300, 400, 500 mm belt width or specify
- ❖ Available in 1000, 2000, 3000 and 6000 mm length or specify
- ❖ Lighting feature, work table, instruction holder and part tray (optional)
- ❖ Variable speed control
- ❖ PLC control (optional)

SPECIFICATIONS	
Description	This unit is used for transferring of PCBs/pallets in the production line.
Machine Length	1500 mm or specify
Belt Width	300, 400, 500 mm or specify
Conveyor Speed	0 - 8 m/min.
Power Source	100, 230VAC 1Ph
Power Consumption	100VA max.

Size	Model No.	Machine Dimension (mm) L x W x H	Height (mm)	Weight (Approximately)
F	NTM3500-F	Specify upon order	950 mm or specify	Depends on length