


Plan View



Front View

Legend
△ : Fixed Point

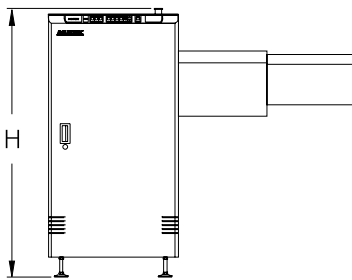

Features

- ❖ User friendly 'soft touch' LED membrane control panel
- ❖ Passage way 'Normally Opened' (850 mm)
- ❖ Swift and smooth retraction/extension of conveyor (frequency inverter controller)
- ❖ Safety sensor installed to enhance safety
- ❖ Smooth and parallel width adjustment (leadscrew)
- ❖ SMEMA compatible

SPECIFICATIONS

SPECIFICATIONS	
Description	This unit is used when a passage way is required in a production line (fully automatic).
Cycle Time	Average 15 seconds
Power Source	100, 230VAC 1Ph
Power Consumption	300VA max.
PCB Thickness	0.6 mm min.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM1700-M	1500 x 775 x 1130	234 mm	225 kg
L	NTM1700-L	1500 x 905 x 1130	234 mm	250 kg