




Features

- ❖ Modular design
- ❖ Stability enhanced by 'robust design'
- ❖ Laser carved stainless steel side guides for superior quality and durability
- ❖ Ergonomically designed arm rest
- ❖ Smooth and parallel width adjustment
- ❖ Width adjustment for individual track can be independently controlled (optional)
- ❖ Inspection Mode (optional)
- ❖ Two independently controlled belt segment
- ❖ Multi-zone concept available upon request
- ❖ Different lengths available upon request
- ❖ SMEMA compatible
- ❖ Patented (SG Patent No.: 91261)

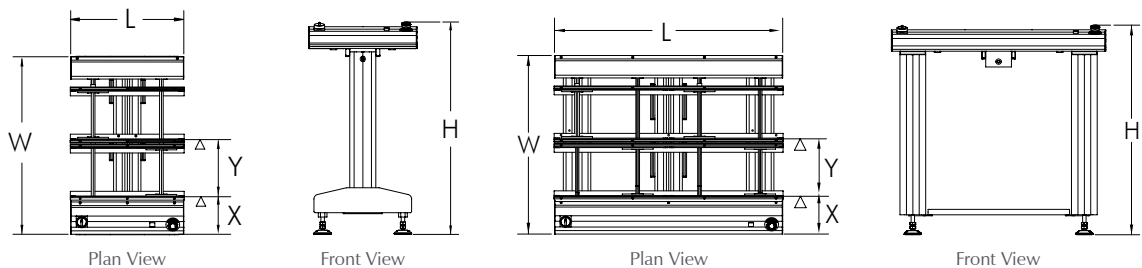

Legend
 Δ : Fixed Point

SPECIFICATIONS

Description	This unit is used to link between SMD machines or board handling units in dual track PCB assembly lines.
Conveyor Concept	Belt
Conveyor Speed	14 m/min. or specify
Fixed to Fixed Rail Distance (Y)	251 mm or specify
PCB Width	50 - 216 mm
Power Source	100, 230VAC 1Ph
Power Consumption	150VA max.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM0401DM-500-1	500 x 780 x 980	165 mm	60 kg
M	NTM0401DM-1000-1	1000 x 780 x 980	165 mm	110 kg