


Features

- ❖ User friendly 'soft touch' LED membrane control panel
- ❖ Pass through mode provided
- ❖ Smooth and parallel width adjustment (leadscrew)
- ❖ Small machine footprint
- ❖ SMEMA compatible



* Tower light (optional)

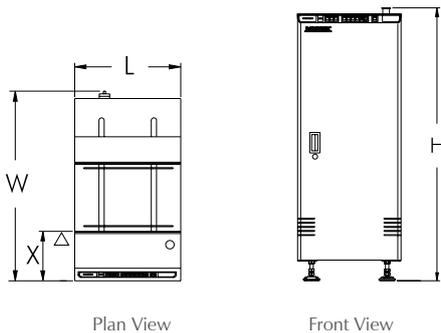

Plan View

Front View

Legend
 △ : Fixed Point

SPECIFICATIONS

Description	This unit is used for restacking of PCBs from the production line.
Maximum PCBs Height	220 mm
Cycle Time	Average 9 seconds
Power Source	100, 230VAC 1Ph
Power Consumption	150VA max.
Air Pressure	4 - 6 bar
Air Consumption	5 ltr/min. max.
PCB Thickness	0.6 - 4 mm

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM2100-M	500 x 905 x 1330	234 mm	120 kg
L	NTM2100-L	500 x 905 x 1330	234 mm	140 kg