


Features

- ❖ User friendly 'soft touch' LED membrane control panel
- ❖ Last In First Out (LIFO) and pass through operating modes
- ❖ Threshold system provided
- ❖ Smooth and parallel width adjustment (leadscrew)
- ❖ Small machine footprint
- ❖ SMEMA compatible



* Tower light (optional)

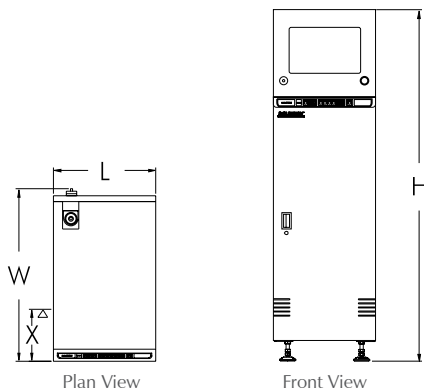

Legend
△ : Fixed Point

SPECIFICATIONS

Description	This unit is used as a buffer between SMD machines.
Maximum PCBs Capacity	20 pcs or specify
Maximum Load	1 kg/PCB
Cycle Time	Average 15 seconds
Indexing Pitch	1 & 2 (25.4 mm pitch) or specify
Power Source	100, 230VAC 1Ph
Power Consumption	250VA max.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM1300-M	500 x 885 x 1730	260 mm	250 kg
L	NTM1300-L	653 x 1040 x 1730	260 mm	300 kg