


Plan View

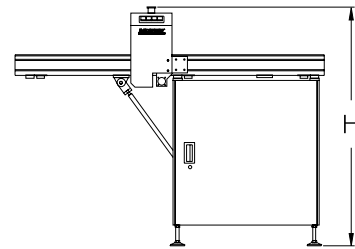

Front View

Legend
 Δ : Fixed Point

Features

- ❖ 600 mm passage way or specify
- ❖ Lowering and lifting of gate conveyor (push buttons control)
- ❖ Safety sensor installed to enhance safety
- ❖ Smooth and parallel width adjustment (leadscrew)
- ❖ SMEMA compatible

SPECIFICATIONS

SPECIFICATIONS	
Description	This unit is used when a passage way is required in a production line (semi automatic).
Cycle Time	Average 7 seconds
Power Source	100, 230VAC 1Ph
Power Consumption	200VA max.
Air Pressure	4 - 6 bar
Air Consumption	48 ltr/min. max.
PCB Thickness	0.6 mm min.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM1600-M	1500 x 570 x 1060	75 mm	115 kg
L	NTM1600-L	1500 x 727 x 1060	75 mm	135 kg